


RAFTERLINK

Side Mounted Timber Rafter Anchor

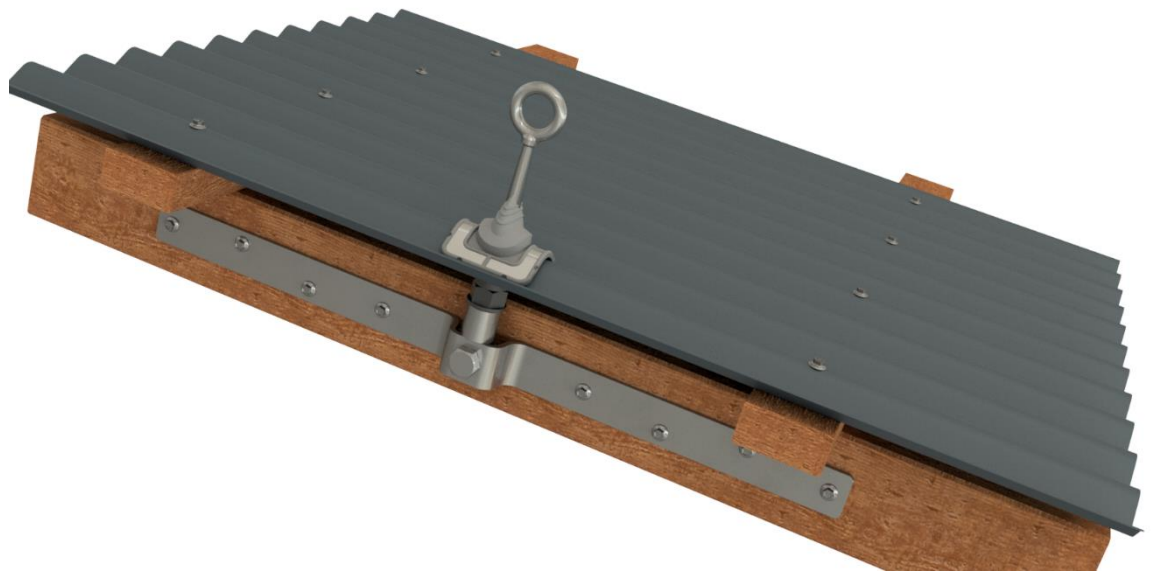

- The RafterLink complete unit includes SafetyLink's patented Eyebolt. The length of the eyebolt enables to protrude above the roof structure when installing into timber structures.
- **Standard Eyebolt** is designed for **fall arrest**, it's long tapered stem is designed to absorb energy while arresting a fall therefore reducing the load off the structure and the person attached to the anchor.

WHAT AM I USED FOR?

An anchor point designed for use on timber structures where there is easy access to the underside of the roof. Installs onto the side of the rafter.

STANDARDS

Complies with AS/NZS 1891.4.

COMPLETE UNIT - PRODUCT CODE: RAFTR004			Weight: 1.682kg
Product Parts	Description	Qty	Material
WASHER 75mm Square	Rubber Hat Washer 75mm	1	Rubber
RAFTER-BASE-SIDE	RafterLink with adapter	1	316 Stainless Steel
EYEBOLT-STANDARD	Standard Eyebolt (Bearing Length 178mm)	1	316 Stainless Steel
NUT LOCKING HEX	M16 Locking Hex Nut	1	316 Stainless Steel

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-72 Version: 15.0

Asia-Pacific/The Americas
+61 249641068
info@safetylink.com

Europe/Africa/Middle East
+33 619493867
europa.sales@safetylink.com

Northern Europe
+44 7599508290
uk.sales@safetylink.com



www.safetylink.com



Catalogue



Anchor Layout Video



Safety Centre
Training

DATA SHEET



FS 707792